


PLASTIC DEBRIS CHUTES

Ozplast Plastic Debris Chutes are expertly engineered to provide a safe, efficient, and reliable solution for the disposal of construction and renovation waste from elevated heights. Manufactured locally in the UAE using high-quality polyethylene, these chutes are designed to be both lightweight and easy to handle.

Their modular design allows for quick assembly and disassembly, making them ideal for use on multi-story buildings and construction sites. Ozplast debris chutes not only enhance on-site safety by minimizing the risk of falling debris, but they also streamline waste management, helping to maintain cleaner and more organized work areas.

HOPPERS





Specification	Hopper
Total Length (mm)	1200
Working Length (mm)	1050
Outer Diameter – Top (mm)	610
Outer Diameter – Bottom (mm)	505
Avg. Weight (kg)	15
Avg. Wall Thickness (mm)	5

www.ozplast.com 07



CHUTES





Front View

Specification	Chute
Total Length (mm)	1220
Working Length (mm)	1070
Outer Diameter – Top (mm)	615
Outer Diameter – Bottom (mm)	505
Avg. Weight (kg)	12
Avg. Wall Thickness (mm)	5








TYPICAL LAYOUT

Each floor will require 1 hopper, 1 pair of brackets and 3 Chutes (dependent on final floor height required). This will result in a total maximum working length of 1050+1070+1070+1070 = 4260mm.

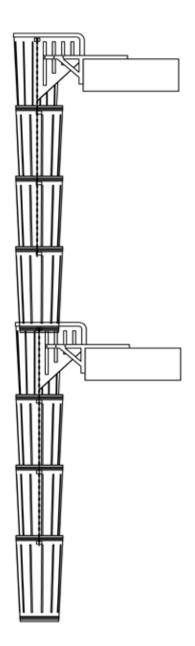

GENERAL FEATURES

- Quick and Easy Installation.
- Ribbed for improved strength.
- **OVER SECTION** Light and durable.
- Ost effective and safe.
- Reusable and UV Resistant.
- O Designed for easy transport and storage.
- ✓ Yellow colour for high visibility.
- Adjustable.



The final heights can be amended simply by adjusting the chain and hooks supplied with the components and increasing or decreasing the overlap of the chutes. The mounting frames can be supplied either galvanized or primer coated.

www.ozplast.com) (0)